

### **Guidelines for lighting and flagging pole length logs:**


Pole length logs must have lighting and flagging according to the Federal Motor Carrier Safety Regulation 393.11 footnote 10 and 393.87 as follows:

1. Logs that project more than 4 feet beyond the rear of the vehicle must have on each side a red lamp that is visible from the side that indicates the maximum overhang of the load.
2. On the rear of the projecting load there must be two red lamps and two red reflectors visible from the rear, at each side, so as to indicate maximum width

These lamps are required whenever lighted lamps are required to be lite.

Where lighting is required there must also be flags. These flags must be mounted on the vehicle at all times. The flags must be red or orange fluorescent and at least 18 inches square.



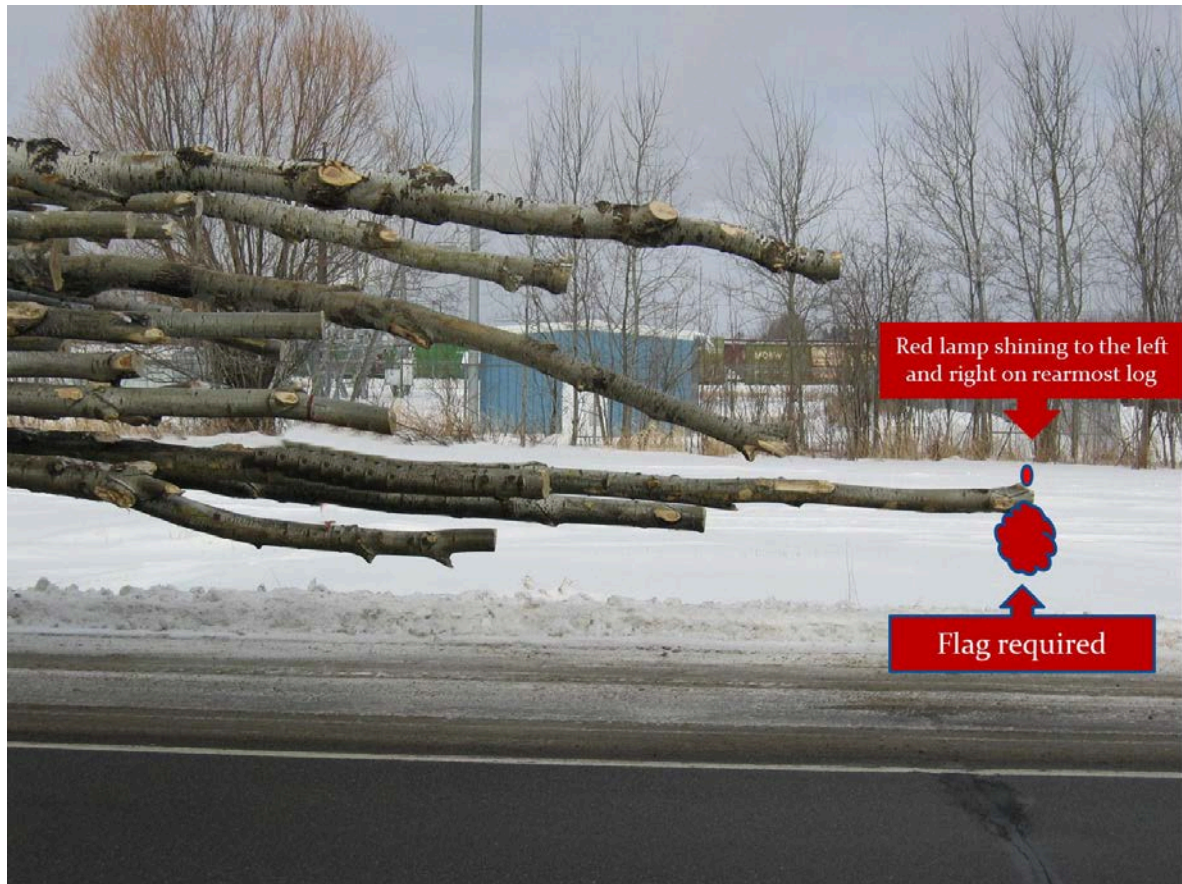

Red lamp shining to the left  
and right on rearmost log

Flag required